



## SERVICE MASTER® 3000

Article No.: 63219GT562

SERVICE MASTER®3000 Coverall is made of advanced plastic film plus a unique non-woven fabric. Conforms to CE Category 3 Type 3, 4, 5 & 6, Antistatic to EN1149 and protects against radioactive particles as per EN1073.2.

Guaranteed to provide an extremely effective barrier against both inorganic chemicals and biological hazards. The design is offering increased mechanical strength, liquid and particulate protection.



EN ISO 13982-1:2004 +A1:2010



EN 13034:2005 +A1:2009



EN 14605:2005 +A1:2009



EN 14605:2005 +A1:2009



EN 1149-5:2008



EN 14126:2003



- EN ISO 13034 (T6)
- EN ISO 13982 (T5)
- EN ISO 14605 (T4)
- EN ISO 13605 (T3)
- EN ISO 14116
- EN 1149-5
- EN 1073-2

### EXCELLENT BARRIER PROTECTION

- A very effective in holding out dust particles and chemicals to meet with 5/6 standards - even better than its predecessor.

### HIGHER COMFORT

- Is lighter and even more breathable than before and certainly the most comfortable 5/6 product on the market.


### ENVIRONMENTALLY FRIENDLY

- Uses 20% less raw materials than any other product on the market whilst offering better barrier.

### SERVICE MASTER® 3000 FEATURES



Offers Excellent Protection Against Biological Hazards And Infective Agents

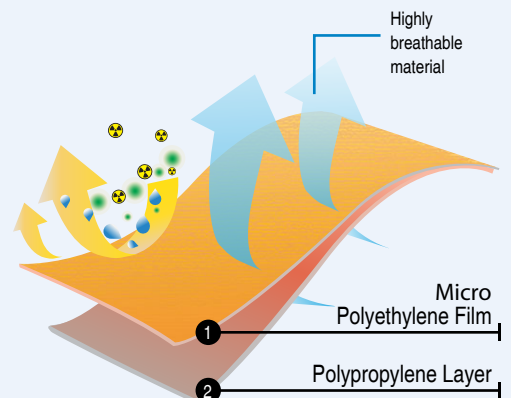

Doc. Control:	Rev.: 3.2	Date: April 9, 2016
---------------	-----------	---------------------

This Article Data Sheet (ADS) is designed and produced by FLOWTRONIX (FT) covered under the intellectual property law. Any reproduction in whole or in part is strictly prohibited without written approval. FT FR 6050-3



## GLYPTEC®

## SERVICE MASTER® 3000

Article No.: 63219GT562

- ROBUST LIGHTWEIGHT PROTECTION
- EXCEPTIONAL LIQUID DEFENSE
- AEROSOL RESISTANT
- OUTSTANDING BREATHABILITY
- EXCEPTIONAL FIT
- ANTI-STATIC TREATMENT
- COMFORTABLE DESIGN
- SILICON-FREE
- ULTRA LOW LINTING

### STYLE & COMPONENTS

1. 3-piece hood with elastic face opening
2. Neck flap with adhesive tape
3. 2-way white nylon coil zipper in main closure
4. 2-ply Double stormflap with adhesive tape and 1-way zipper for secure fastening
5. Elasticated waist on back for a better fit
6. Taped seams and knee reinforcement
7. Elasticated cuffs with thumb loop
8. Elasticated ankles



### PACKING



### PACKING

WHITE

### SIZE CHART

	HEIGHT	
	S	164-170cm (5'4" - 5'6")
	M	167-176cm (5'5" - 5'9")
	L	174-181cm (5'8" - 6')
	XL	179-187cm (5'11" - 6'2")
	2XL	186-194cm (6'1" - 6'4")
3XL	194-200cm (6'3" - 6'6")	
	CHEST	
	S	84-92cm (33" - 36")
	M	92-100cm (36" - 39")
	L	100-108cm (39" - 42")
	XL	108-115cm (42" - 45")
	2XL	115-124cm (45" - 49")
3XL	124-132cm (49" - 52")	

### SUITABLE APPLICATIONS:



### DONNING / DOFFING



Doc. Control:	Rev.: 3.2	Date: April 9, 2016
---------------	-----------	---------------------

This Article Data Sheet (ADS) is designed and produced by FLOWTRONIX (FT) covered under the intellectual property law. Any reproduction in whole or in part is strictly prohibited without written approval.

